

PRODUCT SPECIFICATION INFORMATION

PROJECT NAME

Wall Mounted Toilet

PROJECT LOCATION

DATE

2022/12/15

PREPARED BY



Head Office

American
Standard

WC-7

Toilet - Wall-hung

GLENWALL®

To be specified

Centoco - Seat



☒ **820STSFE-001** FAST-N-LOCK, For elongated bowl, Open front, Heavy duty, For commercial applications, Polypropylene, Toilet seat, With seat cover, Plastic commercial check hinges, and Stainless steel hinge pin, Specified in White finish,

FAST-N-LOCK mounting system takes the guess work out when tightening the hardware. The specially designed fasteners in click" when the appropriate torque is reached. The bolt and nut material shall be stainless steel,

Dimensions:25 mm (1") high, 470 mm (18-1/2") long, 362 mm (14-1/4") wide

Jay R. Smith - Carrier




☒ **0210L** CAULK left hand, ADJUSTABLE FIXTURE FOR SIPHON jet WATER CLOSETS - SHALLOW ROUGH-IN TYPE

American Standard- Toilet

☒ **2882107.020 7381740-200.0020A**



Tank type Toilet, Wall-hung with wall outlet, High Efficiency HET 4.8 LPF (1.28 GPF), White finish Vitreous china, EverClean® antimicrobial surface, Elongated bowl, VorMax™ powerful jet flush action, Manual, Polished chrome left-hand trip lever (7381741-200.0020A), Tank not lined, Without tank cover locking device, Gravity-assisted flush, Dual injection flush valves, Tank coupling components, 52 mm (2-1/16") trapway, CleanCurve™ rim eliminates rim area where dirt and buildup hide, Creates 50% less noise than pressure-assist technology toilets, Toilet seat not included,
Consisting of: 3447101 bowl, 4385A107 HET tank tank,
Overall Dimensions: 452 mm (17-13/16") wide, 749 mm (29-1/2") from finished wall, 833 mm (32-13/16") high
Water Surface:
Map Score: >=1000 MaP® flush score
Compliances: ASME A112.19.2 compliant, CSA B45.1 compliant, EPA WaterSense® compliant.

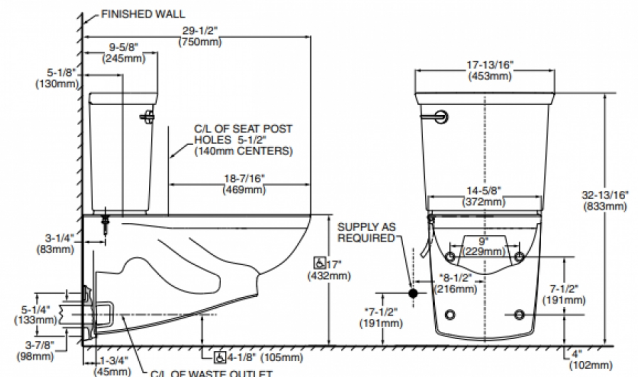

Note:

Spec Reference: 128674
Product Reference: 17172540; 7039790;
7300747

Estimated Total: **Not available**

American
Standard

WC-9

Toilet - Wall-hung

AFWALL® MILLENNIUM™ FloWise®

To be specified

Centoco - Seat



☒ **1500STSCCFE-001** FAST-N-LOCK, For elongated bowl, Open front, Heavy duty, For commercial applications, Polypropylene, Toilet seat, Less seat cover, Plastic commercial check hinges, and Stainless steel hinge pin, Specified in White finish,

FAST-N-LOCK mounting system takes the guess work out when tightening the hardware. The specially designed fasteners in click" when the appropriate torque is reached. The bolt and nut material shall be stainless steel,

Dimensions: 32 mm (1-1/4") high, 473 mm (18-5/8") long, 368 mm (14-1/2") wide

Sloan - Flush Valve



☒ **SL-ROYAL 111-1.28-ESS** ROYAL® Automatic no-touch Exposed Water closet flushometer, 38 mm (1-1/2") spud coupling For top spud toilet, Hardwired, constructed from Semi-red brass, Polished chrome finish, High Efficiency 4.8 LPF (1.28 GPF), Chloramine resistant PERMEX® synthetic rubber diaphragm, OPTIMA® EL-1500 self-adaptive infrared sensor, Sensor located on die cast sensor plate with no visible fasteners (for 2-gang electrical box), Courtesy Flush® electrical override button, Flush tube for 292 mm (11-1/2") rough-in, Adjustable tailpiece, 25 mm (1") I.P.S. screwdriver Bak-Chek® angle control stop with free spinning vandal-resistant stop cap, Dual-filtered fixed bypass, Sweat solder adapter kit with cover tube, High back pressure vacuum breaker, 25 mm (1") supply pipe, Cast wall flange with set screw, Non-hold-open, no external volume adjustment, fixed volume accuracy is controlled by CID™ technology, 24 VAC input/output, With indicator light, Requires transformers 0345154 or 0345999, Pressure Range: 103 - 552 kPa (15 - 80 PSI) operating water pressure
Compliances: cUPC compliant.

☒ **SL-EL-154** For flush valve

Jay R. Smith - Carrier




☒ **0210L** CAULK left hand, ADJUSTABLE FIXTURE FOR SIPHON jet WATER CLOSETS - SHALLOW ROUGH-IN TYPE

American Standard- Toilet

☒ **3351101.020**



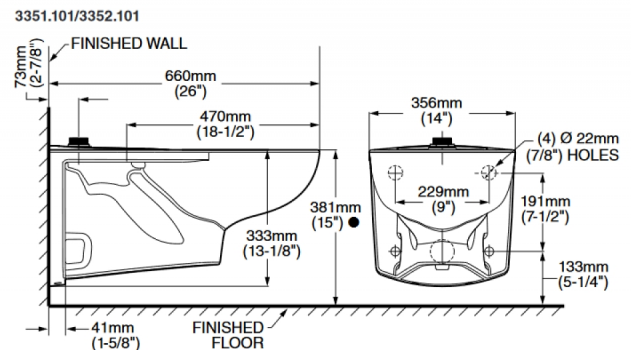




Toilet, Wall-hung with wall outlet, Toilet operates in the range of 4.2 to 6.0 LPF (1.1 - 1.6 GPF), White finish Vitreous china, EverClean® antimicrobial surface, Elongated bowl, Concealed trapway design, Direct-fed siphon jet flush action, 38 mm (1-1/2") top spud, Flush valve by others, Fully-glazed 54 mm (2-1/8") trapway, Static load rating of 454 kg (1000 lb), this product is not recommended for bariatric use, Condensation channel, Toilet seat not included,
Consisting of:
Overall Dimensions: 356 mm (14") wide, 660 mm (26") from finished wall, Water Surface: 254 x 305 mm (10" x 12") water surface area
Map Score: >=1000 MaP® flush score (when use with proper flush valve)
Compliances: ASME A112.19.2 compliant, CSA B45.1 compliant.



Note:

Spec Reference: 128674
Product Reference: 222296; 7039971; 7308524;
7030565; 7300747

Estimated Total: **Not available**
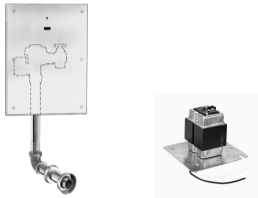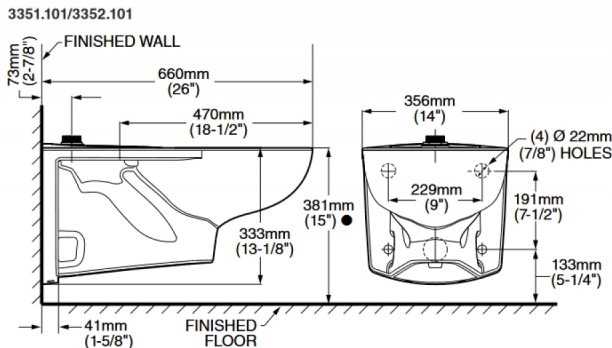
<div>American Standard</div>	<div>WC-10</div>	<div>Toilet - Wall-hung</div>
<div>AFWALL® MILLENNIUM™ FloWise®</div>		
<div>To be specified</div> <div><div>Centoco - Seat</div><div></div><div><div><div><div>☒ 1500STSCFE-001</div><div>FAST-N-LOCK, For elongated bowl, Open front, Heavy duty, For commercial applications, Polypropylene, Toilet seat, Less seat cover, Plastic commercial check hinges, and Stainless steel hinge pin, Specified in White finish,</div></div><div><div>FAST-N-LOCK mounting system takes the guess work out when tightening the hardware. The specially designed fasteners in click" when the appropriate torque is reached. The bolt and nut material shall be stainless steel,</div></div></div><div><div>Dimensions:32 mm (1-1/4") high, 473 mm (18-5/8") long, 368 mm (14-1/2") wide</div></div></div></div>	<div>American Standard- Toilet</div> <div><div>☒ 3353101.020</div><div></div><div><div><div><div>Toilet, Wall-hung with wall outlet, Toilet operates in the range of 4.2 to 6.0 LPF (1.1 - 1.6 GPF), White finish Vitreous china, EverClean® antimicrobial surface, Elongated bowl, Concealed trapway design, Direct-fed siphon jet flush action, 38 mm (1-1/2") back spud, Flush valve by others, Fully-glazed 54 mm (2-1/8") trapway, Static load rating of 454 kg (1000 lb), this product is not recommended for bariatric use, Condensation channel, Toilet seat not included, Consisting of:</div><div><div>Overall Dimensions: 356 mm (14") wide, 660 mm (26") from finished wall, Water Surface: 254 x 305 mm (10" x 12") water surface area</div><div>Map Score: >=1000 MaP® flush score (when use with proper flush valve)</div><div>Compliances: ASME A112.19.2 compliant, CSA B45.1 compliant.</div></div></div></div></div></div>	
<div><div>Sloan - Flush Valve</div><div><div></div><div><div><div><div>☒ SL-ROYAL 140-1.28-WB-ESS</div><div>ROYAL® Automatic no-touch Concealed Water closet flushometer, 38 mm (1-1/2") spud coupling For exposed back spud toilet, Hardwired, constructed from Semi-red brass, Rough brass finish, High Efficiency 4.8 LPF (1.28 GPF), Chloramine resistant PERMEX® synthetic rubber diaphragm, OPTIMA® EL-1500 self-adaptive infrared sensor, Sensor located on wall box cover plate, 330 x 432 mm (13" x 17") EASY ACCESS® wall box with stainless steel front access panel and vandal-resistant screws, Courtesy Flush® electrical override button, Flush tube for 368 mm (14-1/2") rough-in, 51 - 273 mm (2" - 10-3/4") c.c. "L" dimension range, 25 mm (1") I.P.S. wheel handle Bak-Chek® angle control stop, High back pressure vacuum breaker, 25 mm (1") supply pipe, 24 VAC input/output, With indicator light, Requires transformers 0345154 or 0345999, Pressure Range:</div><div>Compliances:</div><div>☒ SL-EL-154 For flush valve</div></div></div></div></div></div>	<div><div><div><div>3351.101/3352.101</div><div></div></div></div></div>	
<div><div>Jay R. Smith - Carrier</div><div><div></div><div><div><div><div>☒ 0210L</div><div>CAULK left hand, ADJUSTABLE FIXTURE FOR SIPHON jet WATER CLOSETS - SHALLOW ROUGH-IN TYPE</div></div></div></div></div></div>		

Note:

Spec Reference: 128674
Product Reference: 7015969; 7039971;
7031377; 7030565; 7300747

Estimated Total: **Not available**